

MARSHALL DAY Acoustics

SICTL NOISE COMPLIANCE ASSESSMENT FEBRUARY 2017

Rp 002 R02 2016256SY | 07 April 2017



Project: SICTL NOISE COMPLIANCE ASSESSMENT

Prepared for: Hutchinson Ports Australia

Level 2, Operations Building SICTL Terminal, Gates B150-153 Sirius Rd off

Foreshore Rd Botany NSW 2019

Attention: Jennifer Stevenson

Report No.: Rp 002 R02 2016256SY

# Disclaimer

Reports produced by Marshall Day Acoustics Pty Ltd are based on a specific scope, conditions and limitations, as agreed between Marshall Day Acoustics and the Client. Information and/or report(s) prepared by Marshall Day Acoustics may not be suitable for uses other than the specific project. No parties other than the Client should use any information and/or report(s) without first conferring with Marshall Day Acoustics.

The advice given herein is for acoustic purposes only. Relevant authorities and experts should be consulted with regard to compliance with regulations or requirements governing areas other than acoustics.

#### Copyright

The concepts and information contained in this document are the property of Marshall Day Acoustics Pty Ltd. Use or copying of this document in whole or in part without the written permission of Marshall Day Acoustics constitutes an infringement of copyright. Information shall not be assigned to a third party without prior consent.

#### **Document Control**

| Status: | Rev: | Comments           | Date:         | Author: | Reviewer: |
|---------|------|--------------------|---------------|---------|-----------|
| Issued  | -    |                    | 20 March 2017 | N Lynar | M Ottley  |
| Issued  | R01  | Minor text update  | 28 March 2017 | N Lynar | M Ottley  |
| Issued  | R02  | Minor text updates | 07 April 2017 | N Lynar | M Ottley  |



# **TABLE OF CONTENTS**

| 1.0 | INTRODUCTION                                   | 4  |
|-----|--|----|
| 2.0 | NOISE LIMITS                                   | 5  |
| 3.0 | ADHERANCE TO PRESCRIBED METHODOLOGY            | 7  |
| 4.0 | COMPLIANCE VERIFICATION METHODOLOGY            | 8  |
| 5.0 | COMPLIANCE SURVEY                              | 9  |
| 5.1 | Unattended noise monitoring                    | 9  |
| 5.2 | Attended measurements at residential receivers | 10 |
| 5.3 | Discussion of results                          | 12 |
| 6.0 | ATTENDED ON-SITE NOISE SURVEY                  |    |
| 6.1 | Estimation of operational noise levels         | 12 |
| 6.2 | Noise prediction model configuration           | 12 |
| 6.3 | Noise model calibration                        | 13 |
| 6.4 | Calibration results                            | 14 |
| 6.5 | Noise modelling results                        | 15 |
| 7.0 | SUMMARY  | 17 |

APPENDIX A UNATTENDED MONITORING DATA

APPENDIX B PLANT INVENTORY AND SOUND POWER LEVELS

APPENDIX C SUMMARY OF MODELLING ASSUMPTIONS

APPENDIX D EPA RESPONSE LETTER

APPENDIX E NOISE CONTOUR PLOTS



# 1.0 INTRODUCTION

Sydney International Container Terminals Pty Ltd (SICTL) located on Sirius Road, Botany was given development consent in October 2005 by the NSW Department of Planning and Environment to construct and operate the Hayes Dock site. The current facility commenced operations in November 2013 under the development consent and also under Environment Protection Licence number 20322. The Environment Protection Licence (EPL) requires that noise monitoring and a compliance assessment is to be undertaken every 6 months. Marshall Day Acoustics Pty Ltd (MDA) has been engaged to conduct the noise monitoring and verify compliance (or otherwise) with the noise limits specified in the EPL.

This report provides the results of our noise monitoring undertaken in February 2017. Also detailed is the methodology and results of the noise modelling undertaken to verify compliance with the EPL noise limits (these noise limits are identical to those specified in the development consent document).

Acoustic terminology used in this report is provided in Appendix A. Supporting evidence concerning the port operations and detailed monitoring results are provided in Appendices B-F.



# 2.0 NOISE LIMITS

The noise limits applicable to the sites as required by the NSW EPA Environment Protection Licence (Licence #20322) are detailed in Section L3 of the licence and reproduced below.

L3.1 Noise from the premises must not exceed the sound pressure level (noise) limits presented in the Table below. Note the limits represent the sound pressure level (noise) contribution, at the nominated receiver locations in the table.

| Most affected                    | Day                          | Evening                      | Evening Night                |                        |
|----------------------------------|------------------------------|------------------------------|------------------------------|------------------------|
| residential location             | L <sub>Aeq (15 minute)</sub> | L <sub>Aeq (15 minute)</sub> | L <sub>Aeq (15 minute)</sub> | L <sub>Aeq, 9hrs</sub> |
| Chelmsford Avenues               | 40                           | 40                           | 40                           | 38                     |
| Dent Street                      | 45                           | 45                           | 45                           | 43                     |
| Jennings Street                  | 36                           | 36                           | 36                           | 35                     |
| Botany Road (north of Golf Club) | 47                           | 47                           | 47                           | 45                     |
| Australia Avenue                 | 35                           | 35                           | 35                           | 35                     |
| Military Road                    | 42                           | 42                           | 42                           | 40                     |

L3.2 Noise from the premises must not exceed the noise limits presented in the Table below. Note the limits represent the noise contribution at the nominated receiver locations in the table.

| Most affected residential location | Night                      |
|------------------------------------|----------------------------|
|                                    | L <sub>A1,(1 minute)</sub> |
| Chelmsford Avenues                 | 53                         |
| Dent Street                        | 59                         |
| Jennings Street                    | 55                         |
| Botany Road (north of Golf Club)   | 59                         |
| Australia Avenue                   | 57                         |
| Military Road                      | 60                         |

L3.3 For the purpose of Condition L3.1 and Condition L3.2:

- Day is defined as the period from 7am to 6pm Monday to Saturday and 8am to 6pm Sundays and Public Holidays,
- Evening is defined as the period from 6pm to 10pm
- Night is defined as the period from 10pm to 7am Monday to Saturday and 10pm to 8am Sundays and Public Holidays

L3.4 For the purpose of Conditions L3.1 and L3.2, noise from the premises is to be measured or computed at the most affected point within the residential boundary, or at the most affected point within 30 metres of the dwelling where the dwelling is more than 30 metres from the boundary, to determine compliance with the noise level limits in Conditions L3.1 and L3.2 unless otherwise stated.



- L3.5 Noise from the premises is to be measured at 1m from the dwelling facade to determine compliance with the  $L_{A1(1minute)}$  noise limits at Condition L3.2
- L3.6 Where it can be demonstrated that direct measurement of noise from the premises is impractical, the EPA may accept alternative means of determining compliance (see Chapter 11 of the NSW Industrial Noise Policy (INP)).
- L3.7 The modification factors presented in Section 4 of the NSW Industrial Noise Policy shall also be applied to the measured noise level from the premises where applicable.
- L3.8 The noise limits specified at Conditions L3.1 and L3.2 apply under the following meteorological conditions:
  - (a) wind speeds up to 3 m/s at 10 metres above ground level; and
  - (b) temperature inversion conditions of up to 1.5 C/100m



#### 3.0 ADHERANCE TO PRESCRIBED METHODOLOGY

- In accordance with Conditions L3.1 and L3.2 (and conditions C2.7 of the development consent.), both unattended and attended measurements were conducted at the most affected point within the residential boundaries of the nominated residential receivers.
- With reference to Condition L3.5 (and Condition C2.8), L<sub>A1</sub> noise levels were measured at the boundaries of the residences, not at 1m from the facade, as it was not possible to access the facade of the dwellings at all times of the day.
- Direct measurement of noise from the operation of the premises at the receiver locations is impractical due to the complex noise environment in the vicinity of the site and receivers. Therefore, in accordance with Condition L3.6 (and Condition C2.9), the unattended and attended noise monitoring was supplemented with an alternative means of determining compliance via the use of a 3-D noise model. This is in accordance with Chapter 11 of the NSW Industrial Noise Policy which allows for measurements to be taken close to the source and then calculated out to the specified receiver locations. Determination of compliance via the use of a 3-D noise model was approved by the NSW EPA on 11 July 2014 (Appendix D) and the NSW EPA requirements were provided to MDA prior to the commencement of the project.
- The assessment receiver locations considered in the noise model are in accordance with the requirements specified in conditions L3.4 and L3.5 (and Conditions C2.7 and C2.8).
- In accordance with Condition L3.7 (and Condition C2.10), the modification factors from Chapter 4 of the NSW *Industrial Noise Policy* are also applied to the measured or calculated noise level from the operation of the premises (where applicable).
- Noise limits used to verify compliance (or otherwise) have been applied under the following meteorological conditions specified in Condition L3.8 (and Condition 2.11) of the EPA Licence:
  - (a) wind speeds up to 3m/s at 10m above the ground level; or
  - (b) temperature inversion conditions of up to 1.5C/100m.



# 4.0 COMPLIANCE VERIFICATION METHODOLOGY

The noise environment around the site is complex, comprising influences from a range of variable factors. Key complicating variables in this respect are:

- The presence of other existing noise generating industries in the area including the Patrick container terminal and DP World container terminal which also influence the noise environment in the vicinity of the SICTL.
- Frequent traffic movements on Foreshore Road and Botany Road which influence both the underlying background and total ambient noise environment in the surrounding area.
- Frequent air traffic movements due to the proximity of the site to the Sydney Airport.

The noise environment in the vicinity of the residential receivers is also complex, and comprises influence from a range of noise sources which include the industrial noise sources associated with the port, industrial noise sources associated with other industries in the area and road and air traffic noise.

Given the complexity of environmental noise conditions and the large distances between operational noise sources on the SICTL site and the receiver locations, isolating the contribution of different noise sources is problematic in practice. In recognition of these factors, the following methodology was used to verify compliance with the noise limits detailed in Section 2.0:

- Attended measurements of plant noise were conducted at specific points in the vicinity of the
  plant. Measurements were undertaken under typical operating conditions. The sound pressure
  levels measured in the vicinity of each plant item were then used to estimate the sound power
  level of each plant item.
- A 3-D noise model of site and its receivers was developed and the estimated sound power levels
  were input into the noise model to calculate the noise contribution from the site at the nearest
  receivers. Where possible long term measurements of noise from the premises were used to
  calibrate the noise model.
- The calculated noise levels were compared to the measured noise levels and to the noise limits detailed in Section 2.0.



#### 5.0 COMPLIANCE SURVEY

# 5.1 Unattended noise monitoring

It should be noted that the original EPA planning consent nominated six off-site residential locations. The EPA subsequently accepted a proposal from SLR Consulting Australia Pty Ltd to reduce the number of residential receivers to two only as part of an accepted methodology of assessment through computer modelling. As such only two residential locations have been used for assessment.

Previous assessments conducted in November 2014 and July 2015 utilised 34 Dent Street, Botany and 59 Jennings Street, Matraville for assessment. Due to unavailability of the 59 Jennings Street location, the January 2016 assessment utilised a replacement location, 74 Australia Avenue, Matraville, selected in line with EPA nominations detailed in Section 2.0. The receiver locations used for assessment in this report are the same as those used in the January 2016 and July 2016 assessment:

- 34 Dent Street, Botany
- 74 Australia Ave, Matraville

In order to measure noise levels at the selected receivers, noise loggers were setup from 3 February 2017 to 17 February 2017.

In the INP, the background noise level is termed the Rating Background Level (RBL). The methodologies used to determine the long-term RBL and  $L_{Aeq}$  noise levels are from Tables 3.1 and 3.2 of the INP. The RBL and  $L_{Aeq}$  noise levels for Day, Evening and Night-time periods at each monitoring location are summarised below. The survey details and noise level results for the entire survey period are summarised in Appendix B.

In determining the noise levels at the monitoring locations, any data affected by rainfall and high wind speed has been excluded in accordance with the provisions of Appendix B of the EPA Industrial Noise Policy. Weather data was collected at 34 Dent Street via a WXT520 Vaisala weather station and has been used in completing the assessment.



Table 1: Summary of unattended measurements

| Period                        | dB L <sub>Aeq</sub> | RBL | Comments   |
|-------------------------------|---------------------|-----|--|
| 74 Australia Avenue, Matravil | le                  |     |  |
| Day                           | 53                  | 40  | Background noise levels (dB  |
| Evening                       | 56                  | 42  | L <sub>A90</sub> ) measured at this location are in excess of the noise limit  |
| Night                         | 47                  | 38  | for the Day, Evening and Night-time periods. Analysis of the measured data has determined that noise impacts from the SICTL site at this location cannot be isolated due to the presence of other noise sources including traffic, aircraft and other industrial facilities in the vicinity of the receiver. |
| 34 Dent Street, Botany        |                     |     |  |
| Day                           | 55                  | 47  | Background noise levels (dB  |
| Evening                       | 55                  | 46  | L <sub>A90</sub> ) measured at this location are in excess of the noise limit  |
| Night                         | 51                  | 41  | for the Day and Evening periods. Analysis of the measured data has determined that noise impacts from the SICTL site at this location cannot be isolated due to the presence of other noise sources including traffic, aircraft and other industrial facilities in the vicinity of the receiver.             |

#### **5.2** Attended measurements at residential receivers

In order to quantify the nature of the noise environment at the residential receivers a series of measurements were conducted during the Day, Evening and Night periods in the vicinity of the two residential receivers. Day period measurements were conducted on 06 February and Evening and Night period measurements were conducted on the 15 February 2017.

Results of the attended noise level measurements conducted at each receiver location are summarised in Table 2 below along with the subjective impression of the engineer who conducted these measurements.



Table 2: Attended measurements at receiver locations

| Period                                 | $dB \; L_{Aeq}$ | dB L <sub>A90</sub> | Subjective impression  |
|--|-----------------|---------------------|--|
| 74 Australia Ave,                      | Matraville      |                     |  |
| Day 52<br>1105-1120hrs                 |                 | 49                  | Some nearby industrial noise audible from adjacent factory and other nearby industrial sites   |
| 06 Feb 2017                            |                 |                     | Distant road traffic noise from Beauchamp Rd,<br>Bunnerong Rd and Botany Road controlled<br>background level                                     |
|  |                 |                     | Aircraft activity overhead clearly audible   |
|  |                 |                     | No audible industrial noise from port  |
| Evening<br>2131-2146hrs<br>15 Feb 2017 | 53              | 51                  | The noise environment included intermittent local traffic along Australia Avenue as well as birds, crickets, cicadas and occasional dog barking. |
| 13160 2017                             |                 |                     | Distant road traffic noise from Beauchamp Rd,<br>Bunnerong Rd and Botany Road controlled<br>background level                                     |
|  |                 |                     | Aircraft activity overhead clearly audible   |
|  |                 |                     | No audible industrial noise from port  |
| Night 2201-2216hrs                     | 55 51           |                     | Distant road traffic noise from Beauchamp Rd,<br>Bunnerong Rd and Botany Road controlled<br>background level                                     |
| 15 Feb 2017                            |                 |                     | Aircraft activity overhead clearly audible   |
|  |                 |                     | No audible industrial noise from port  |
| 34 Dent Street, Bo                     | otany           |                     |  |
| Day<br>1017-1032hrs                    | 57              | 52                  | The noise environment was dominated by traffic noise from Foreshore Road and Botany Road including trucks accelerating at traffic lights         |
| 06 Feb 2017                            |                 |                     | Aircraft activity overhead clearly audible   |
|  |                 |                     | Minimal amount of local traffic along Dent Street  |
|  |                 |                     | No audible industrial noise from port  |
| Evening<br>2109-2124hrs<br>15 Feb 2017 | 48              | 45                  | The noise environment was dominated by traffic noise from Foreshore Road and Botany Road including trucks accelerating at traffic lights         |
|  |                 |                     | Aircraft activity overhead clearly audible   |
|  |                 |                     | Minimal amount of local traffic along Dent Street  |
|  |                 |                     | No audible industrial noise from port  |
|  |                 |                     |  |



| Period                               | dB L <sub>Aeq</sub> | dB L <sub>A90</sub> | Subjective impression  |
|--------------------------------------|---------------------|---------------------|--|
| Night<br>2221-2236hrs<br>15 Feb 2017 | 49                  | 44                  | The noise environment was dominated by traffic noise from Foreshore Road and Botany Road including trucks accelerating at traffic lights and constant road traffic noise |
|                                      |                     |                     | Minimal amount of local traffic along Dent Street  |
|                                      |                     |                     | Aircraft activity overhead clearly audible   |
|                                      |                     |                     | No audible industrial noise from port  |

#### 5.3 Discussion of results

A review of the unattended monitoring data indicates that the ambient noise levels are significantly above the EPL and Development Consent noise limits at each of the receiver locations. The contribution from the SICTL site at these locations cannot accurately be determined due to the influence of other noise sources in the vicinity of the receivers. Furthermore, the results of the attended monitoring conducted at the two receiver locations as well as the subjective impressions of the engineer conducting the measurements indicate that noise from the SICTL site could not be perceived at these locations. We note that even if port related noise was audible that due to the presence of two other container terminals in the vicinity of the receivers, any audible port related noise at these locations could have been generated at any one of the container terminals.

As compliance cannot be accurately verified based on the unattended and attended monitoring results, noise modelling in accordance with the requirements of the EPA was carried out to determine the noise contribution from the SICTL site the nearest receivers. This noise modelling is discussed in the following sections of this report.

#### 6.0 ATTENDED ON-SITE NOISE SURVEY

A series of attended measurements were conducted at the SICTL site on 19 January, 03 February and 22 February 2017, while the site was operating under typical conditions.

This measurement data was then used to calculate the estimated noise level contribution from each individual plant item/process at the nearest receiver.

# 6.1 Estimation of operational noise levels

Using the sound pressure level measured in the vicinity of each plant item and the reference distance, at which the measurement was undertaken, the approximate sound power level of each plant item has been calculated and used to model noise emissions from the site. A table of derived sound power levels is provided in Appendix C.

#### 6.2 Noise prediction model configuration

An environmental noise model for the site has been developed by MDA using SoundPLAN 7.4, a commercially available computer modelling package. For this project, our noise model for predication of sound levels has used ISO 9613-2 Acoustics - *Attenuation of sound during propagation outdoors* as the propagation algorithm methodology.

Calculations are based on commonly adopted geometric divergence of noise sources in addition to a range of factors affecting the attenuation of sound, including:

- The magnitude of the noise source in terms of sound power
- The distance between the source and receiver.



- The presence of obstacles such as screens or barriers in the propagation path including any buildings on site, and terrain data
- The presence of reflecting surfaces such as building facades
- The ground absorption, defined by hardness of the ground between the source and receiver (100% hard ground assumed to be conservative)
- Attenuation due to atmospheric absorption.
- Meteorological effects such as wind gradient, temperature gradient, humidity. These generally have significant impact at distances greater than approximately 400m. The ISO-9613 method deals with the meteorological conditions favourable to propagation of sound. Over large distances (>400m), meteorological conditions can have a significant influence on noise level propagation. The environmental noise model has assumed worst case meteorological conditions for non-arid areas i.e. moderate (F-class stability category) temperature inversion or downwind conditions with wind speeds less than 3m/s. It is assumed that drainage airflow does not occur at this site, as the source level is not elevated relative to the residential receiver level.

#### 6.3 Noise model calibration

For the purpose of calibrating the noise model results, two noise loggers were placed on site concurrent with the off-site monitoring. The locations of the calibration loggers are shown in Figure 1 below. The on-site calibration loggers were 01dB Duo smart monitors which have the capability to record audio. Noise levels were measured during the entire survey period in one second intervals and the loggers were also used to make audio recordings at both locations. The measurements obtained were used to determine the noise levels experienced at each calibration position for comparison to the noise level predicted via the use of calculations.





#### 6.4 **Calibration results**

The noise levels measured at both calibration locations were heavily impacted by extraneous noise sources, predominantly aircraft due to the proximity of the site to the Sydney Airport, but also operations from adjacent sites. Direct examination of the calibration logger results therefore does not immediately identify the noise generated by the site. The audio recordings taken at this location were analysed, with a representative sample chosen and all 1 second measurements affected by aircraft noise and some road traffic noise eliminated as far as practicable in order to determine the L<sub>Aeq</sub> noise level contribution from the site operations only.

The noise levels derived at the calibration points (with extraneous data eliminated) are compared to the predicted noise levels in Table 3 below. The period chosen for analysis, 0015-0145hrs on 16 February 2017, contained a vessel being unloaded at the wharf to ensure that noise sources close to each of the calibration points were included in analysis.



**Table 3: Noise model calibration results** 

| Location            | Time period | Derived levels from measurements | Predicted noise level <sup>1</sup> |
|---------------------|-------------|----------------------------------|------------------------------------|
| Calibration Point 1 | Day         | 56dB L <sub>Aeq (15min)</sub>    | 54-56dB L <sub>Aeq (15min)</sub>   |
| Calibration Point 2 | Day         | 63dB L <sub>Aeq (15min)</sub>    | 63-65dB L <sub>Aeq (15min)</sub>   |

Note 1: Range from typical to worst case predicted noise level.

For both Calibration Point 1 and Calibration Point 2, the derived noise levels appear to be in close correlation with the predicted noise levels. Given the accurate correlation of derived and predicted noise levels we consider our predictions to be representative of the site operations.

# 6.5 Noise modelling results

Noise emissions from the site have been estimated via calculation at the nearest receivers and are presented in Table 4 overleaf. Details of the operating scenarios considered and assumptions regarding typical and worst case plant operation are based on information provided by SICTL and detailed in Appendix D.

Table 4: Calculated noise contribution from SICTL site at nearest receivers – dB

|                            | Day   |                                  | Evening N                                     |                                     | Night   | Night                               |   |  |
|----------------------------|---|----------------------------------|---|-------------------------------------|---|-------------------------------------|---|--|
|                            | Calculated<br>noise<br>level L <sub>Aeq</sub> | Noise<br>limit, L <sub>Aeq</sub> | Calculated<br>noise<br>level L <sub>Aeq</sub> | Noise<br>limit,<br>L <sub>Aeq</sub> | Calculated<br>noise<br>level L <sub>Aeq</sub> | Noise<br>limit,<br>L <sub>Aeq</sub> | Calculated<br>noise<br>level L <sub>Aeq</sub> | Noise limit,<br>L <sub>Aeq (9 hours)</sub> |
| 74<br>Australia<br>Avenue  |   |                                  |   |                                     |   |                                     |   |  |
| Typical operation          | 30  | 35                               | 30  | 35                                  | 25  | 35                                  | 25  | 35   |
| Worst<br>case<br>operation | 31  | 35                               | 31  | 35                                  | 26  | 35                                  | 26  | 35   |
| 34 Dent<br>Street          |   |                                  |   |                                     |   |                                     |   |  |
| Typical operation          | 42  | 45                               | 42  | 45                                  | 42  | 45                                  | 42  | 43   |
| Worst<br>case<br>operation | 43  | 45                               | 43  | 45                                  | 42  | 45                                  | 42  | 43   |



Calculated noise levels for both typical and worst case operation of the site comply with the noise limits at the nominated sensitive receivers. Note that for the Night period we have assumed that the operations during the busiest 15 minute period are repeated constantly over the entire 9 hour Night period, although we would expect this is unlikely in practice.

Based on the above the current operations on site comply with the EPL and Development Consent  $L_{eq}$  noise criteria.

Summarised in Table 5 overleaf is the contribution from high noise generating sources that are impulsive in nature and generate noise levels closest to the Night time  $L_{A1(60sec)}$  noise limits.

Table 5: Calculated L<sub>A1(60sec)</sub> noise level contribution from SICTL site

| Source description                         | 74<br>Australia<br>Ave | Noise<br>limit, dB<br>L <sub>A1,(1min)</sub> | Compliance? | 34 Dent<br>St | Noise<br>limit, dB<br>L <sub>A1,(1min)</sub> | Compliance? |
|--|------------------------|--|-------------|---------------|--|-------------|
| Spreader engaging with ship's hatch cover  | 32                     | 57   | ✓           | 41            | 59   | ✓           |
| Hatch cover being landed within Quay Apron | 37                     | 57   | ✓           | 48            | 59   | ✓           |
| Container landing within Quay Apron        | 34                     | 57   | ✓           | 46            | 59   | ✓           |

During our site surveys we did observe hatch cover plates being landed and the spreader engaging with these plates landside but did not observe these activities occurring shipside due to limitations on measuring aboard the ship. As there were no measurements taken aboard the ship we have incorporated the landside hatch cover impact measurements into our noise model at the shipside location.

It should be noted that the calculated noise levels presented in Table 5 are lower than previous assessments for the hatch cover land and spreader engaging with hatch cover. We were advised by Quay Crane operators the decreased noise levels is due to improved training, crane operator techniques (i.e. taking better care) and overall increased operator experience.

Calculated maximum noise levels associated with impulsive noise generating activities on the site comply with the noise limits at the nominated sensitive receivers. Based on the above the current operations on site comply with the EPL and Development Consent noise criteria for sleep arousal.

In accordance with the section L3.7 of the NSW EPA Environment Protection Licence (Licence #20322) we have assessed the site against Section 4 of the NSW Industrial Noise Policy for modifying factors of tonality, low-frequency noise, impulsive noise and intermittent noise.

Due to the large number of sources operating on site at one time the overall levels at the receiver do not fluctuate significantly above the background level due to impact events such as hatch cover drops. As such the intermittency modifying factory does not apply. From our observations on site, measurements at the receiver locations and modelling results we confirm that none of the modifying factors from Section 4 of the NSW INP apply to the overall noise levels at the receivers.



#### 7.0 SUMMARY

- To satisfy the requirements of the EPL for the operation of the SICTL site, Marshall Day
  Acoustics conducted short term attended and long-term unattended noise monitoring at 34
  Dent Street and 74 Australia Ave.
- Assessment of the SICTL site noise compliance is complicated by a range of variables affecting the derivation of the noise contribution from activities conducted on the site.
- As compliance could not be accurately determined on the basis of monitoring conducted at the receiver locations, MDA developed a 3-D noise model to determine the noise contribution from the site at the nearest receivers via calculation. In order to develop the noise model, attended measurements were conducted on site in the vicinity of operational noise sources. These measurements were used to establish sound power levels for all equipment which were then incorporated into the noise model and the noise contribution of each plant item was calculated back to the receiver locations.
- The results of the noise model have been compared with the noise levels measured at two
  on-site calibration points. The predicted noise levels correlate closely with the measured
  noise levels and therefore we consider the noise model to be representative of the site
  operations.
- The results of the noise model indicate the noise emissions from the site comply with the noise limits at 34 Dent Street and 74 Australia Ave.
- It should be noted that the measured noise levels for several plant items were marginally
  lower than our previous assessments. While on site we were advised by plant operators the
  decreased noise levels were due to a higher level of maintenance and general upkeep on
  machinery during recent months.



# Glossary of terminology

**Ambient** The ambient noise level is the noise level measured in the absence of the intrusive

noise or the noise requiring control. Ambient noise levels are frequently measured

to determine the situation prior to the addition of a new noise source.

SPL or L<sub>P</sub> Sound Pressure Level

A logarithmic ratio of a sound pressure measured at distance, relative to the

threshold of hearing (20 µPa RMS) and expressed in decibels.

SWL or L<sub>w</sub> Sound Power Level

A logarithmic ratio of the acoustic power output of a source relative to 10<sup>-12</sup> watts and expressed in decibels. Sound power level is calculated from measured sound pressure levels and represents the level of total sound power radiated by a sound

source.

dB Decibel

The unit of sound level.

Expressed as a logarithmic ratio of sound pressure P relative to a reference pressure

of Pr=20  $\mu$ Pa i.e. dB = 20 x log(P/Pr)

dBA The unit of sound level which has its frequency characteristics modified by a filter (A-

weighted) so as to more closely approximate the frequency bias of the human ear.

**A-weighting** The process by which noise levels are corrected to account for the non-linear

frequency response of the human ear.

L<sub>Aeq (t)</sub> The equivalent continuous (time-averaged) A-weighted sound level. This is

commonly referred to as the average noise level.

The suffix "t" represents the time period to which the noise level relates, e.g. (8 h) would represent a period of 8 hours, (15 min) would represent a period of 15

minutes and (2200-0700) would represent a measurement time between 10 pm and

7 am.

L<sub>A90</sub> The A-weighted noise level equalled or exceeded for 90% of the measurement

period. This is commonly referred to as the background noise level.

L<sub>Amax</sub> The A-weighted maximum noise level. The highest noise level which occurs during

the measurement period.

L<sub>A01</sub> The A-weighted noise level which is equalled or exceeded for 1% of the

measurement period. This is sometimes referred to as the typical maximum noise

level.



# APPENDIX A UNATTENDED MONITORING DATA

# A1 74 Australia Avenue, Matraville

A noise logger was setup in the back yard of the residential receiver located at 74 Australia Ave, Matraville.


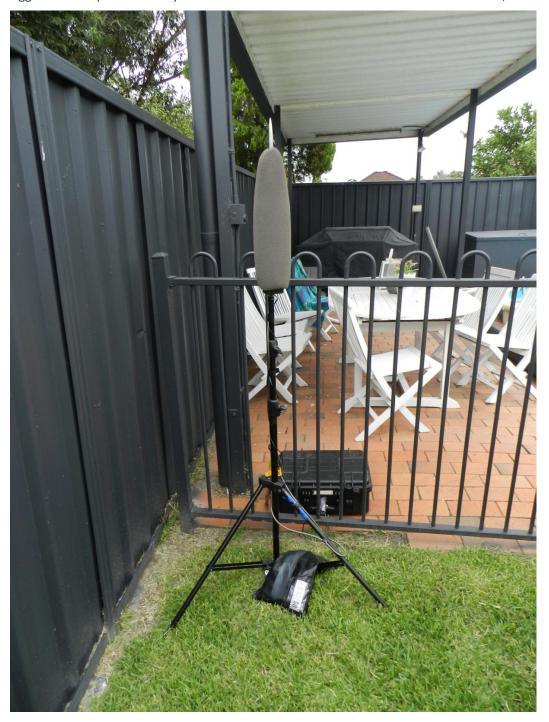



Figure 2: Noise logger installed at 74 Australia Ave, Matraville

Noise levels were continuously logged in 15 minute intervals at this location using a 01dB Duo noise logger (Serial number 10349) between 3 February 2017 and 17 February 2017. The noise logger was calibrated before and after conducting the measurements and no significant drift was observed.


The noise survey results are presented graphically overleaf:




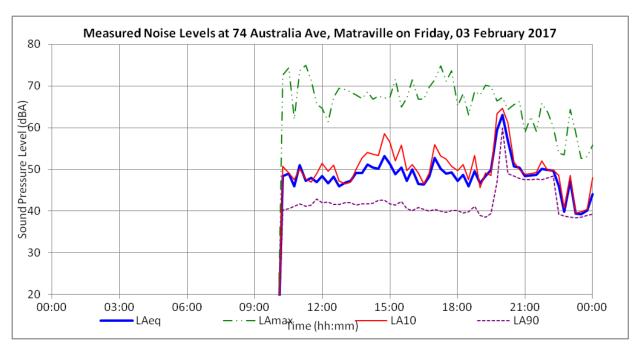

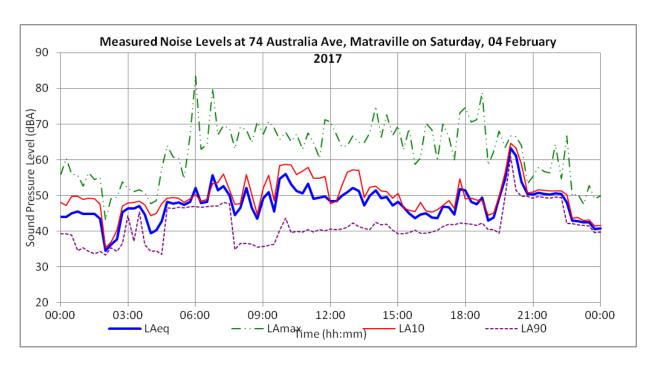





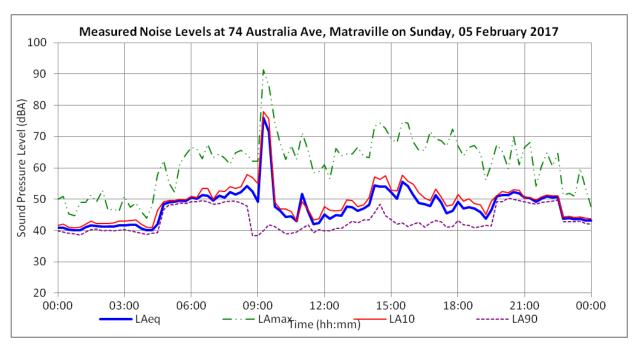

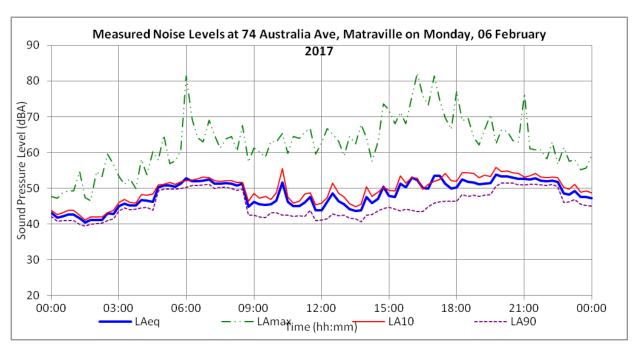





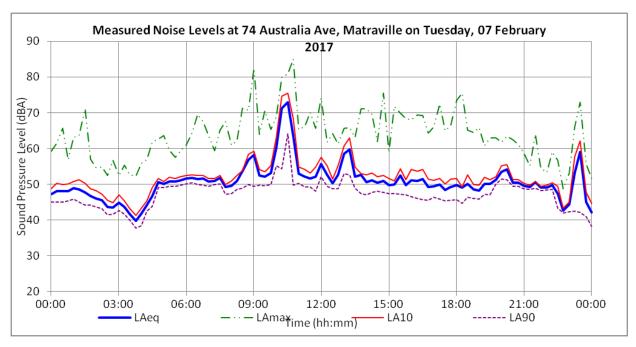

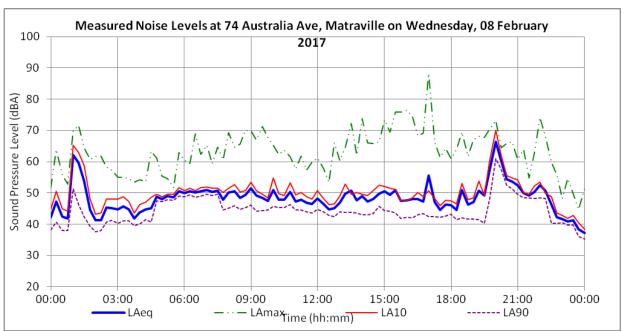





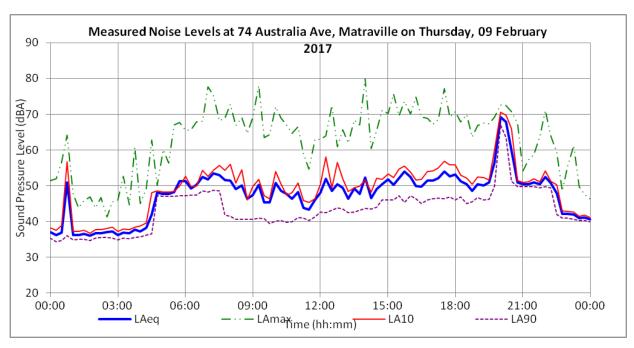

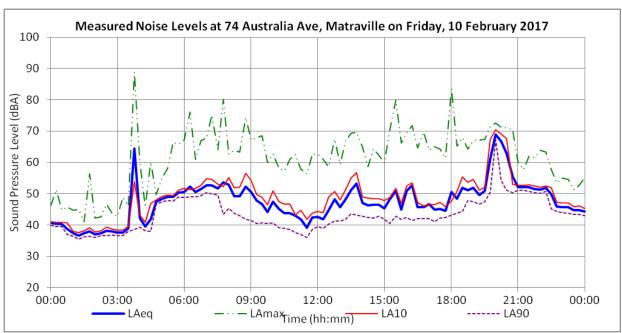





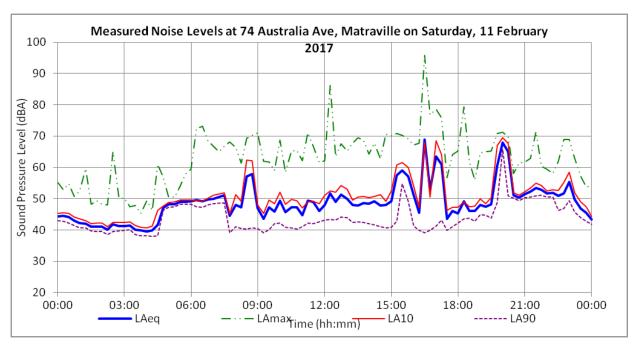

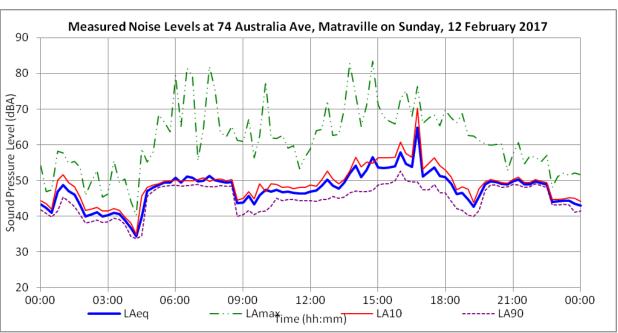





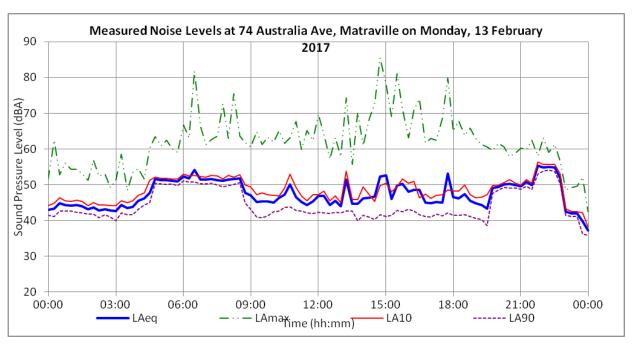

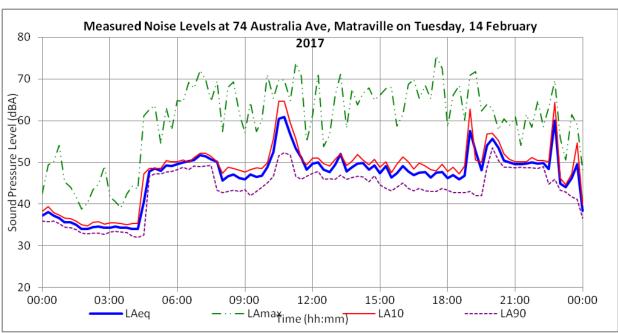



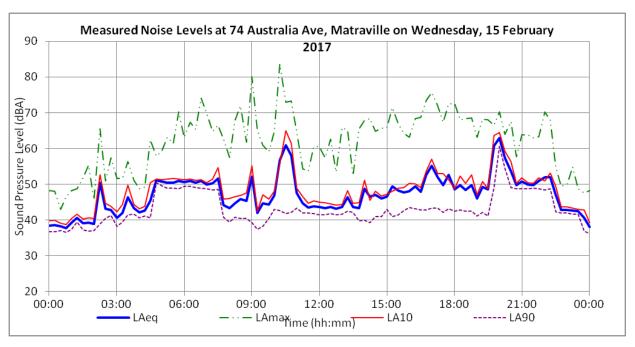

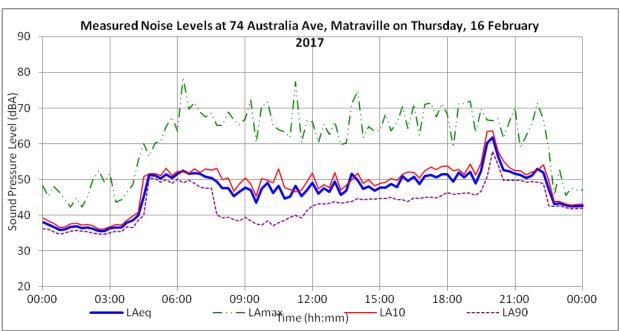



# A2 34 Dent Street


A noise logger was setup at the rear boundary of the residential receiver located at 34 Dent Street, Botany.




Figure B2: Noise logger and weather station installed at 34 Dent Street, Botany


Noise levels were continuously logged in 15 minute intervals at this location using a 01dB Cube noise logger (Serial number 10344) between 3 February 2017 and 16 February 2017. The noise logger was calibrated before and after conducting the measurements and no significant drift was observed. The noise survey results are presented graphically overleaf.




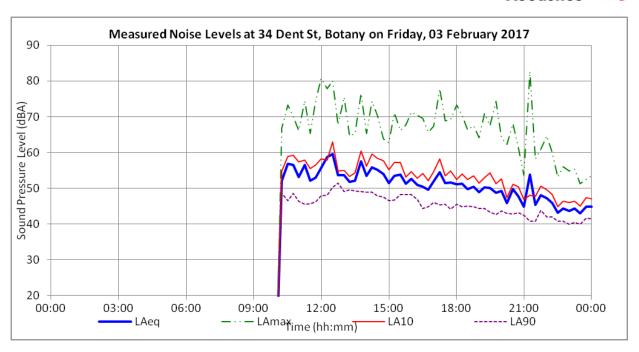

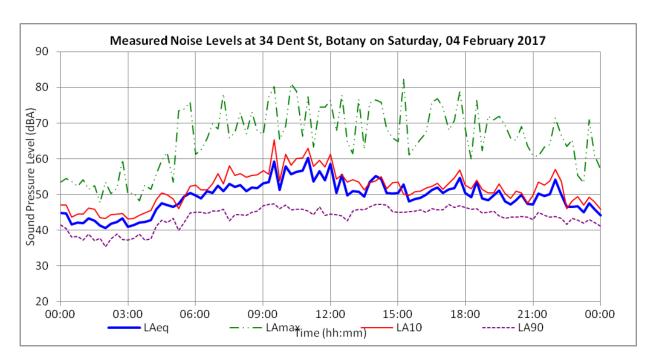





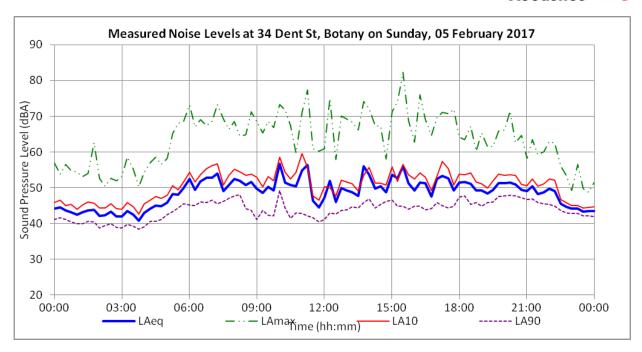

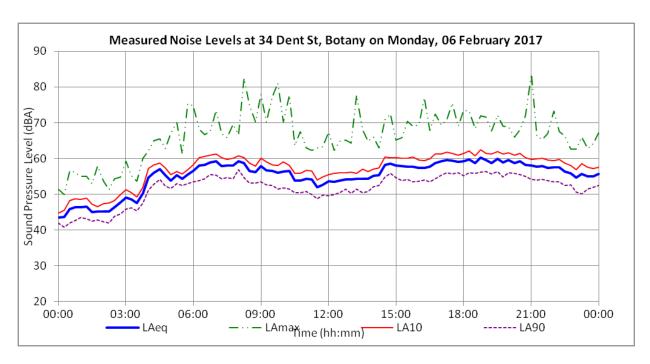





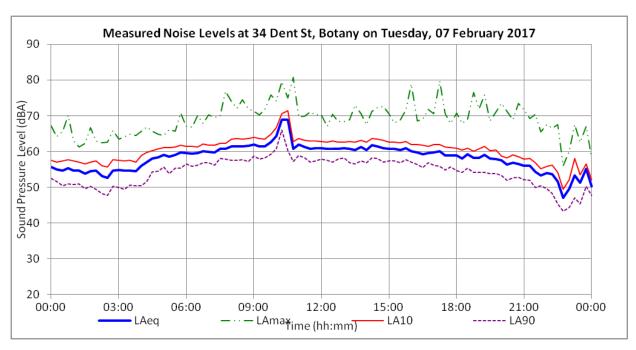

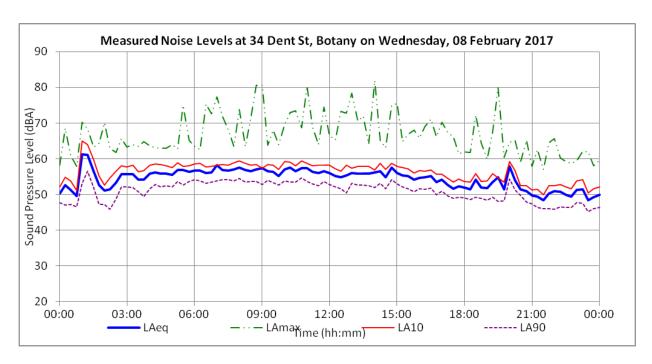





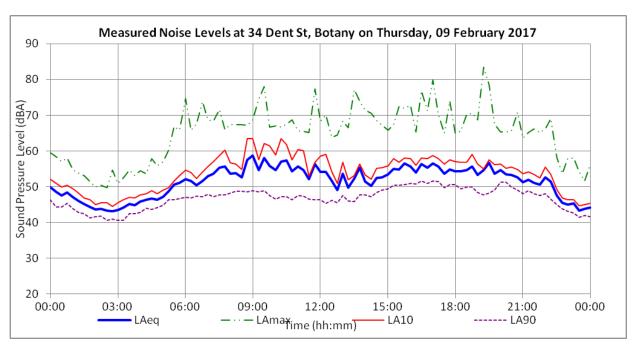

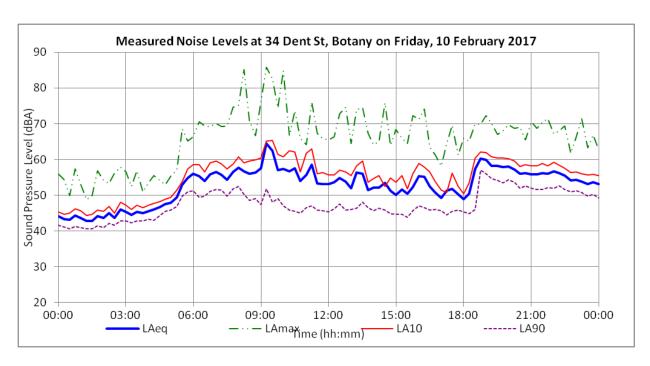





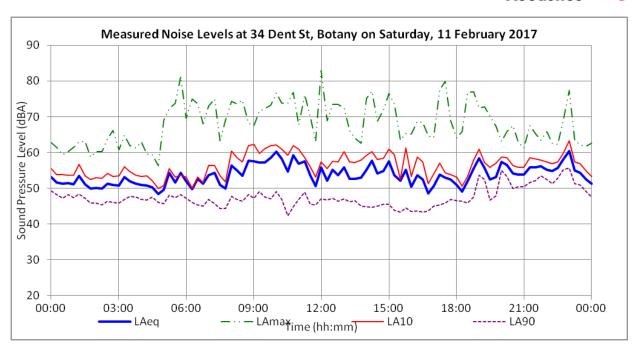

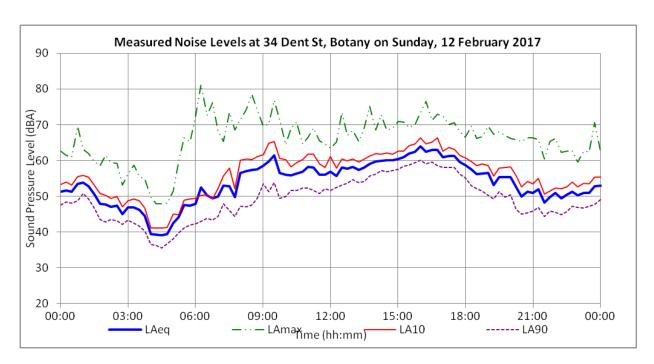





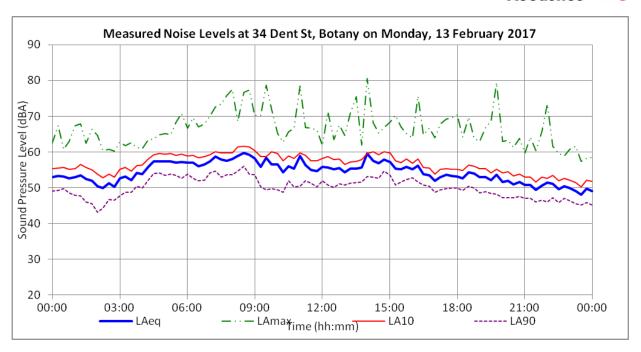

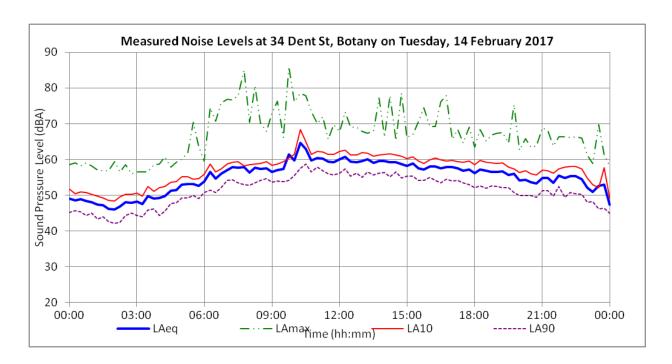



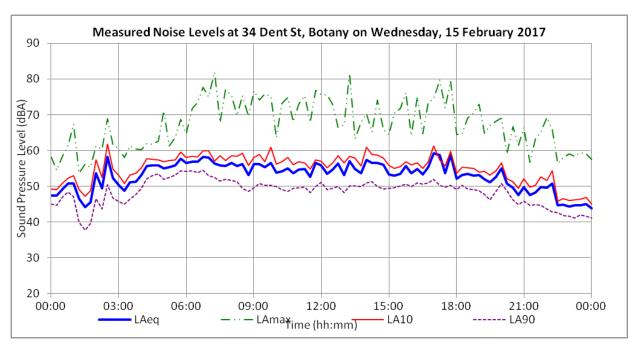

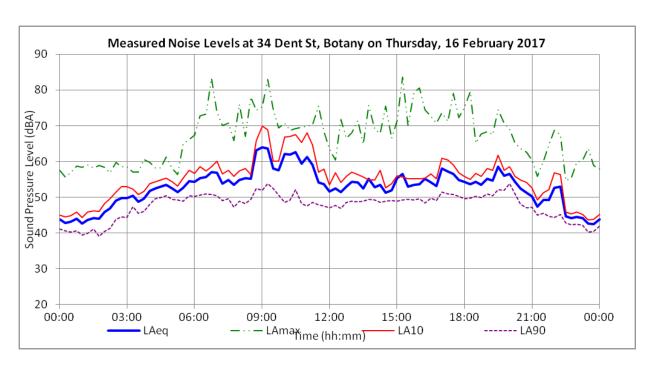



# APPENDIX B PLANT INVENTORY AND SOUND POWER LEVELS

The following inventory of large plant was provided by SICTL.

Table C1: SICTL Inventory of Large Plant

| Active /<br>Inactive | Master<br>Asset ID | Description                 | Serial No | Build<br>Year | Туре                  | Manufacturer / OEM | Comments                                      |
|----------------------|--------------------|-----------------------------|-----------|---------------|-----------------------|--------------------|---|
| А                    | QC01               | Quay Crane                  | 1661-1    | 2012          | Shuttle Boom<br>Crane | ZPMC               | Height = 55m total,<br>~37m to ropes          |
| А                    | QC02               | Quay Crane                  | 1661-2    | 2012          | Shuttle Boom<br>Crane | ZPMC               | Height = 55m total,<br>~37m to ropes          |
| А                    | QC03               | Quay Crane                  | 1715-1    | 2012          | Shuttle Boom<br>Crane | ZPMC               | Height = 55m total,<br>~37m to ropes          |
| А                    | QC04               | Quay Crane                  | 1715-2    | 2012          | Shuttle Boom<br>Crane | ZPMC               | Height = 55m total,<br>~37m to ropes          |
| А                    | ASC01L             | Automated<br>Stacking Crane | ASC-G1334 | 2013          | -                     | Kone Cranes        | Height = 24m total,<br>~22m to hoisting motor |
| А                    | ASC01W             | Automated<br>Stacking Crane | ASC-G1335 | 2013          | -                     | Kone Cranes        | Height = 24m total,<br>~22m to hoisting motor |
| А                    | ASC02L             | Automated<br>Stacking Crane | ASC-G1336 | 2013          | -                     | Kone Cranes        | Height = 24m total,<br>~22m to hoisting motor |
| А                    | ASC02W             | Automated<br>Stacking Crane | ASC-G1337 | 2013          | -                     | Kone Cranes        | Height = 24m total,<br>~22m to hoisting motor |
| А                    | ASC03L             | Automated<br>Stacking Crane | ASC-G1338 | 2013          | -                     | Kone Cranes        | Height = 24m total,<br>~22m to hoisting motor |
| А                    | ASC03W             | Automated<br>Stacking Crane | ASC-G1339 | 2013          | -                     | Kone Cranes        | Height = 24m total,<br>~22m to hoisting motor |



| A | ASC04L | Automated<br>Stacking Crane | ASC-G1550    | 2015 | _        | Kone Cranes | Height = 24m total, ~22m to hoisting motor    |
|---|--------|-----------------------------|--------------|------|----------|-------------|---|
| A | ASC04W | Automated Stacking Crane    | ASC-G1551    | 2015 | _        | Kone Cranes | Height = 24m total, ~22m to hoisting motor    |
| A | ASC05L | Automated Stacking Crane    | ASC-G1552    | 2015 | _        | Kone Cranes | Height = 24m total, ~22m to hoisting motor    |
| A | ASC05W | Automated<br>Stacking Crane | ASC-G1553    | 2015 | -        | Kone Cranes | Height = 24m total, ~22m to hoisting motor    |
| A | ASC06L | Automated<br>Stacking Crane | ASC-G1554    | 2015 | -        | Kone Cranes | Height = 24m total, ~22m to hoisting motor    |
| A | ASC06W | Automated<br>Stacking Crane | ASC-G1555    | 2015 | -        | Kone Cranes | Height = 24m total,<br>~22m to hoisting motor |
| Α | SC01   | Shuttle Carrier             | 4927         | 2013 | SHC250H  | Cargotec    | Height ~9m to engine                          |
| Α | SC02   | Shuttle Carrier             | 4928         | 2013 | SHC250H  | Cargotec    | Height ~9m to engine                          |
| А | SC03   | Shuttle Carrier             | 4929         | 2013 | SHC250H  | Cargotec    | Height ~9m to engine                          |
| Α | SC04   | Shuttle Carrier             | 4930         | 2013 | SHC250H  | Cargotec    | Height ~9m to engine                          |
| Α | SC05   | Shuttle Carrier             | 4931         | 2013 | SHC250H  | Cargotec    | Height ~9m to engine                          |
| Α | SC06   | Shuttle Carrier             | 4932         | 2013 | SHC250H  | Cargotec    | Height ~9m to engine                          |
| Α | SC07   | Shuttle Carrier             | 4933         | 2013 | SHC250H  | Cargotec    | Height ~9m to engine                          |
| Α | SC08   | Shuttle Carrier             | 4934         | 2013 | SHC250H  | Cargotec    | Height ~9m to engine                          |
| А | RS01   | Reach Stacker               | 13RS45020090 | 2013 | SRSC45C2 | Sany        | Height of engine ~<br>1.5m                    |
| А | RS02   | Reach Stacker               | 13RS45020091 | 2013 | SRSC45C2 | Sany        | Height of engine ~<br>1.5m                    |
|   | RS03   | Reach Stacker               | 14RS45450058 | 2014 | SRSC4545 | Sany        | Height of engine ~                            |

Rp 002 R02 2016256SY - SICTL NOISE COMPLIANCE ASSESSMENT - FEB 2017



|   |        |                                     |                    |      |                   |         | 1.5m                       |
|---|--------|-------------------------------------|--------------------|------|-------------------|---------|----------------------------|
|   | RS04   | Reach Stacker                       | 14RS45450059       | 2014 | SRSC4545          | Sany    | Height of engine ~<br>1.5m |
| А | EH01   | Empty Handler                       | 13DG1080030        | 2013 | SDCY100K8-T       | Sany    | Not In Use                 |
| А | FL01   | Fork Lift 16 T                      | 13CP16010015       | 2013 | SCP160C           | Sany    | Not measured               |
| А | FL02   | Fork Lift 5T                        | P455D 006 9888CNF  | 2013 | C50SD / V3800T    | Clark   | Not measured               |
| А | FL03   | Fork Lift 2.5T                      | P232D 1419 9843CNF | 2013 | C25D              | Clark   | Not measured               |
| А | FL04   | Fork Lift 2.5T                      | P232D 1352 9843CNF | 2013 | C25D              | Clark   | Not measured               |
| I | FL05   | Fork Lift 2.5T                      | NA                 | NA   | GEX25             | Clark   | Not measured               |
| А | EWP01  | Elevated<br>workplatform            | 300171339          | 2013 | JLG 800AJ         | JLG     | Not In Use                 |
| А | EWP02  | Elevated<br>workplatform            | B200013419         | 2013 | JLG324ES          | JLG     | Not In Use                 |
| А | TT01   | Terminal<br>Tractor                 | NA                 | 2013 | Terberg           | Terberg | Not In Use                 |
| А | NSG 02 | Reefer<br>Generator 02<br>(25 Plug) | NA                 | NA   | Rental Waterfront | NA      | Not In Use                 |
| А | NSG 03 | Reefer<br>Generator 03<br>(25 Plug) | NA                 | NA   | Rental Waterfront | NA      | Not In Use                 |
| А | NSG 04 | Reefer<br>Generator 04(<br>30 Plug) | NA                 | NA   | Rental Waterfront | NA      | Not In Use                 |

Photos of each plant type referenced above are provided overleaf





Figure 3: Reach Stacker





Figure 4: Shuttle Carrier





Figure 5: Quay Crane





Figure 6: ASC unloading container





Figure 7: Rail Activity



The octave band sound power level derived for each plant item is detailed in Table C2 below.

**Table C2: Octave Band Sound Power Level** 

|   | Octave Ba | Octave Band Centre Frequency (Hz) |     |     |      |      |      |     |
|---|-----------|-----------------------------------|-----|-----|------|------|------|-----|
| Source  | 63        | 125                               | 250 | 500 | 1000 | 2000 | 4000 | dBA |
| ASC Roller and Quacker  | 90        | 91                                | 89  | 87  | 89   | 105  | 104  | 108 |
| Quay Crane Quacker  | 90        | 87                                | 96  | 94  | 95   | 93   | 86   | 99  |
| Quay Crane Rollers  | 99        | 96                                | 89  | 89  | 85   | 81   | 84   | 92  |
| Truck reversing in ASC area                                       | 92        | 84                                | 80  | 86  | 90   | 92   | 84   | 96  |
| Truck idling in ASC area  | 85        | 85                                | 80  | 87  | 84   | 81   | 78   | 89  |
| Truck accelerating from idling and driving out of ASC lane        | 95        | 89                                | 86  | 86  | 87   | 84   | 81   | 91  |
| Truck movement  | 92        | 90                                | 86  | 86  | 88   | 88   | 81   | 93  |
| Train locomotive (3 x locomotives)                                | 112       | 108                               | 112 | 109 | 105  | 105  | 106  | 113 |
| Train locomotive idling (3 x locomotives)                         | 113       | 108                               | 107 | 98  | 94   | 93   | 93   | 103 |
| Train shunting LA1 L <sub>w</sub>                                 | 109       | 110                               | 112 | 113 | 117  | 118  | 114  | 123 |
| Shuttle in Quay Crane area  | 105       | 102                               | 103 | 103 | 99   | 97   | 92   | 105 |
| Hatch Cover plate landing L <sub>A1</sub> Lw                      | 129       | 126                               | 116 | 113 | 113  | 107  | 101  | 117 |
| Spreader attempting to engage with hatch cover plate $L_{\!A1}Lw$ | 122       | 121                               | 114 | 109 | 108  | 106  | 99   | 114 |
| Container landing L <sub>A1</sub> Lw                              | 118       | 121                               | 116 | 114 | 110  | 104  | 99   | 116 |
| Shuttle carrier movement in ASC Area                              | 100       | 102                               | 105 | 106 | 100  | 98   | 93   | 107 |
| Reach stacker in Train Area                                       | 111       | 117                               | 118 | 107 | 103  | 100  | 97   | 112 |
| Reach stacker movement in Exchange pad area                       |           | 87                                | 96  | 94  | 95   | 93   | 86   | 99  |



#### APPENDIX C SUMMARY OF MODELLING ASSUMPTIONS

SICTL has provided the following typical and worst case operational scenarios. SICTL have reported that not all worst cast scenarios are underway at once as there is not enough plant to do this. Yard, quay and rail operations are managed for efficient usage of plant – this system is colour-coded below. Additionally, the differences between the INP noise periods and the SICTL shift times are explained in the table below.

Note: Where it has been advised there is 'no night shift planned' there will be no machinery operating in the specified work area throughout the night shift period.

Table D1: SICTL Typical and Worst Case Operating Scenarios

| Area | Governing<br>INP Period | SICTL work times within each INP period                              | TYPICAL Operating Scenario   | WORST-CASE Operating Scenario   |  |
|------|-------------------------|--|--|---|--|
| QUAY | Day                     | Part of Day shift 0700 - 1400<br>& Part of Evening shift 1400 - 1800 | 2 Quay Cranes working one ship<br>4 Shuttle Carriers (2 per Quay Crane)<br>2 Small forklifts & 2 light vehicles      | 4 Quay Cranes working two ships<br>8 Shuttle Carriers (2 per Quay Crane)<br>3 Truck & Trailer (ITV)<br>2 Small forklifts & 4 light vehicles |  |
|      | Evening                 | Part of Evening shift 1800 - 2200                                    | 2 Quay Cranes working one ship<br>4 Shuttle Carriers (2 per Quay Crane)<br>2 Small forklifts & 2 light vehicles      | 4 Quay Cranes working two ships<br>8 Shuttle Carriers (2 per Quay Crane)<br>3 Truck & Trailer (ITV)<br>2 Small forklifts & 4 light vehicles |  |
|      | Night                   | All of Night shift 2200 - 0600<br>& Part of Day shift 0600 - 0700    | 2 Quay Cranes working one ship<br>4 Shuttle Carriers (2 per Quay Crane)<br>2 Small forklifts & 2 light vehicles      | 4 Quay Cranes working two ships<br>8 Shuttle Carriers (2 per Quay Crane)<br>3 Truck & Trailer (ITV)<br>2 Small forklifts & 4 light vehicles |  |
| YARD | Day                     | Part of Day shift 0700 - 1400<br>& Part of Evening shift 1400 - 1800 | 12 Automated Stacking Cranes (always working) 2 Reach Stacker, 1 Shuttle Carrier 2 light vehicles 40 trucks per hour | 12 Automated Stacking Cranes (always<br>working)<br>2 Reach Stacker, 1 Shuttle Carrier<br>2 light vehicles<br>60 trucks per hour            |  |



| Area | Governing SICTL work times within each INP period INP Period |  | TYPICAL Operating Scenario   | WORST-CASE Operating Scenario  |  |
|------|--|--|--|--|--|
|      | Evening  | Part of Evening shift 1800 - 2200                                    | 12 Automated Stacking Cranes (always working) 2 Reach Stacker, 1 Shuttle Carrier 2 light vehicles 40 trucks per hour | 12 Automated Stacking Cranes (always<br>working)<br>2 Reach Stacker, 1 Shuttle Carrier<br>2 light vehicles<br>60 trucks per hour |  |
|      | Night  | All of Night shift 2200 - 0600<br>& Part of Day shift0600 - 0700     | 12 Automated Stacking Cranes (always working) 2 Reach Stacker, 1 Shuttle Carrier 2 light vehicles 40 trucks per hour | 12 Automated Stacking Cranes (always<br>working)<br>2 Reach Stacker, 1 Shuttle Carrier<br>2 light vehicles<br>60 trucks per hour |  |
| RAIL | Day  | Part of Day shift 0700 - 1400<br>& Part of Evening shift 1400 - 1800 | 2 Reach Stackers 1 Shuttle Carrier 1 light vehicle 3 trains per shift  | 3 Reach Stackers<br>1 Shuttle Carrier<br>1 light vehicle<br>4 trains per shift   |  |
|      | Evening  | Part of Evening shift 1800 - 2200                                    | 2 Reach Stackers 1 Shuttle Carrier 1 light vehicle 3 trains per shift  | 3 Reach Stackers<br>1 Shuttle Carrier<br>1 light vehicle<br>4 trains per shift   |  |
|      | Night  | All of Night shift 2200 - 0600<br>& Part of Day shift 0600 - 0700    | 2 Reach Stackers<br>No Trains  | 2 Reach Stackers<br>No Trains  |  |

Based on the above schedule Marshall Day has incorporated the following assumptions to model the typical and worst case noise operations of the site. As a worst case scenario we have assumed that the Quay, Yard and Rail operations will all occur concurrently. However, in reality it is understood that typically only 2 of the three areas will be operating at full capacity simultaneously.

Note: Where it has been advised there is 'no night shift planned' there will be no machinery operating in the specified work area throughout the night shift period.

**Table D2: Noise model assumptions** 

| DAY TIME TYPICAL  | DAY TIME WORST CASE   | EVENING TIME TYPICAL  | EVENING TIME WORST CASE   | NIGHT TIME<br>TYPICAL  | NIGHT TIME WORST CASE  |  |  |
|---|---|---|---|--|--|--|--|
|   | CASE  | TTPICAL   | WORST CASE  | TTPICAL  | CASE   |  |  |
| Quay Area   |   |   |   |  |  |  |  |
| Quay Crane x 2 Operating for 80% of the time. Speed is 5km/h. Assumed that quay crane rollers operate for 5% of the time. | Quay Crane x 4 Operating for 80% of the time. Speed is 5km/h. Assumed that quay crane rollers operate for 5% of the time. | Quay Crane x 2 Operating for 80% of the time. Speed is 5km/h. Assumed that quay crane rollers operate for 5% of the time. | Quay Crane x 4 Operating for 80% of the time. Speed is 5km/h. Assumed that quay crane rollers operate for 5% of the time. | Quay Crane x 2 Operating for 80% of the time. Speed is 5km/h. Assumed that quay crane rollers operate for 5% of the time | Quay Crane x 4 Operating for 80% of the time. Speed is 5km/h. Assumed that quay crane rollers. operate for 5% of the time. |  |  |
| Shuttle Carrier x 4<br>4 x picking up containers at<br>crane Unloading/loading<br>for 20% of the time.                    | Shuttle Carrier x 8<br>8 x picking up containers<br>at crane<br>Unloading/loading for<br>20% of the time.                 | Shuttle Carrier x 4<br>4 x picking up containers at<br>crane Unloading/loading<br>for 20% of the time.                    | Shuttle Carrier x 8 8 x picking up containers at crane Unloading/loading for 20% of the time.                             | Shuttle Carrier x 4<br>4 x picking up containers at<br>crane Unloading/loading<br>for 20% of the time.                   | Shuttle Carrier x 8 8 x picking up containers at crane Unloading/loading for 20% of the time.                              |  |  |
| ASC Area and Exchange Pa  | d/Yard  |   |   |  |  |  |  |
| 12 x ASC Crane. 10 movements in a 15 minute period. 2 x Reach Stacker.  | 12 x ASC Crane. 15 movements in a 15 min period. 4 x Reach Stacker.   | 12 x ASC Crane. 10 movements in a 15 minute period. 2 x Reach Stacker.  | 12 x ASC Crane. 15 movements in a 15 min period. 4 x Reach Stacker.   | 12 x ASC Crane. 10 movements in a 15 minute period. 2 x Reach Stacker.   | 12 x ASC Crane. 15 movements in a 15 min period. 4 x Reach Stacker.  |  |  |
| Moves for 50% of time.  | Each moves for 50% of the time.   |   | Each moves for 50% of the time.   |  | Each moves for 50% of the time.  |  |  |

| DAY TIME TYPICAL   | DAY TIME WORST<br>CASE  | EVENING TIME TYPICAL   | EVENING TIME<br>WORST CASE  | NIGHT TIME<br>TYPICAL  | NIGHT TIME WORST<br>CASE  |
|--|---|--|---|--|---|
| 1 x Shuttle Carrier<br>Moves for 60% of time.  | 1 x Shuttle Carrier<br>Moves for 60% of time.   | 1 x Shuttle Carrier<br>Moves for 60% of time.  | 1 x Shuttle Carrier<br>Moves for 60% of the time  | 1 x Shuttle Carrier<br>Moves for 60% of the time   | 1 x Shuttle Carrier<br>Moves for 60% of the time  |
| 10 truck movements in 15 minute period at 10km/h speed. 10 container landings in 15 min period | <ul><li>15 Truck movements in</li><li>15 min period at</li><li>10km/h speed.</li><li>15 container landings in</li><li>15 min period</li></ul> | 10 truck movements in 15 minute period at 10km/h speed. 10 container landings in 15 min period | <ul><li>15 Truck movements in</li><li>15 min period at</li><li>10km/h speed.</li><li>15 container landings in</li><li>15 min period</li></ul> | 10 truck movements in 15 minute period at 10km/h speed. 10 container landings in 15 min period | <ul><li>15 Truck movements in</li><li>15 min period at</li><li>10km/h speed.</li><li>15 container landings in</li><li>15 min period</li></ul> |
| Rail Area  |   |  |   |  |   |
| 2 x Reach Stackers.<br>Each moves for 50%<br>of the time.                                      | 3 x Reach Stackers.<br>Each moves for 50% of the<br>time.   | 2 x Reach Stackers.<br>Each moves for 50%<br>of the time.                                      | 3 x Reach Stackers.<br>Each moves for 50% of the time.  | 2 x Reach Stackers.<br>Each moves for 50%<br>of the time.                                      | 3 x Reach Stackers.<br>Each moves for 50% of<br>the time.   |
| 1 x Shuttle Carrier.<br>Moves for 60% of the time  | 1 x Shuttle Carrier.<br>. Moves for 60% of the time.  | 1 x Shuttle Carrier.<br>Moves for 60% of the time.   | 1 x Shuttle Carrier.<br>Moves for 60% of the time.  | No activity  | No activity   |
| 1 x Train movement i.e. 3 locomotives in 3 hours. 1 x Shunting                                 | 1 x Train movement<br>i.e. 4 locomotives in<br>2 hours.<br>2 x Shunting   | 1 x Train movement i.e. 3 locomotives in 3 hours. 1 x Shunting                                 | 1 x Train movement<br>i.e. 4 locomotives in<br>2 hours.<br>2 x Shunting   | No activity  | No activity   |



#### APPENDIX D EPA RESPONSE LETTER



Our reference: DOC14/127781 Contact: Jacqueline Roberts

> Mr John Ieroklis Environmental & Safety Compliance Engineer Hutchison Ports Australia PO Box 734 Botany NSW 1455

Dear John

# Re: Sydney International Container Terminals Port Botany Terminal 3 – Operational Compliance Measurements SLR Proposed Scope of Works

The Environment Protection Authority (EPA) has reviewed correspondence from SLR Consulting Australia Pty Ltd ("SLR") dated 5 June 2014 submitted on behalf of Hutchison Ports Australia ("HPA") detailing a proposed methodology for conducting noise measurements and modelling at the Sydney International Container Terminal ("SICTL") as an alternative to conducting environmental noise monitoring at all six noise monitoring locations outlined in the SICTL environment protection licence (EPL No. 20322).

The EPA does not object to the use of a calibrated noise model in this case to demonstrate compliance with the noise limits specified on EPL No. 20322. However, it is noted that the EPA's position may change in the future due to technological, physical or operational changes in and around the licensed premises.

The following aspects of the proposed modelling approach should be addressed:

- Input Sound Power Levels (SWL) will need to be updated from time to time to reflect any deterioration in the noise performance of the plant and equipment used on site, and any additions or replacements:
- A detailed inventory must be maintained, and provided with model results, to enable tracking of
  plant and equipment introduction and replacement, as well as any deterioration in noise
  performance. This inventory should include:
  - Source noise levels (for example SWL or Sound Pressure Levels measured at a specified distance) for each individual item of plant and equipment;
  - Details, including source noise levels, of each item during each activity undertaken by that item (for example, for the ASC this includes during winching, rolling noise, movement alarms and when unloading containers to trucks); and
  - Service and replacement date and description for each item.
- Representative source heights and locations will need to be chosen carefully as they will significantly affect any barrier attenuation and the resulting predicted noise contribution of the site at both the calibration point and receiver locations. This will be especially important in the case of

PO Box 668 Parramatta NSW 2124 Level 13, 10 Valentine Avenue, Parramatta NSW 2150 Tel: (02) 9995 5000 Fax: (02) 9995 6900 ABN 43 692 285 758 www.epa.nsw.gov.au



Page 2

- unshielded sources such as locomotive exhausts, likely to be above the 3m high barrier which is adjacent to the rail siding; and
- The methodology used, scenarios modelled and uncertainties will need to be described in detail in any noise compliance reports, so that the EPA can have confidence that the predicted noise levels at receiver locations are representative of the likely actual received noise levels.

Particular care will be needed in calibrating the model against measurements made at the proposed calibration point, which will be affected by road traffic noise from Foreshore Road as well as other sources in the area including ships in port, the existing Patrick container terminal, an adjoining construction site and Sydney Airport. The EPA requires at least two on-site calibration points which is likely to provide a more reliable result, by allowing measurements to be shielded from road traffic and airport noise and to allow the effect of local sources to be accounted for.

If you have any questions or queries in regards the above, please do not hesitate to contact Jacqueline Roberts on (02) 9995 5259.


Yours sincerely

11 July 2014

JAMES GOODWIN Unit Head – Sydney Industry Environment Protection Authority



#### APPENDIX E NOISE CONTOUR PLOTS

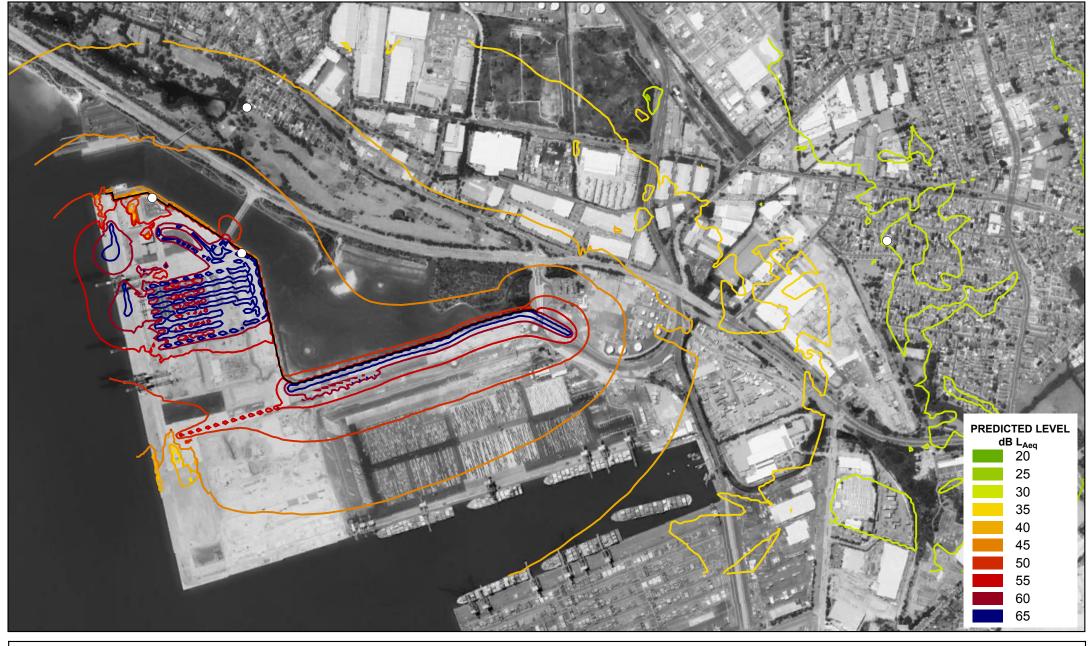



Prediction method: ISO 9613-2:1996

Model number: 1
Version: SoundPLAN 7.4

File: Day Typical

Prediction Height: 1.5 m

Project number: 2016256SY

Client name: SICTL

#### **SCALE**


0 50 100 200 300 400 m



# Survey 2 - February 2017

Day/Evening - Typical Operation



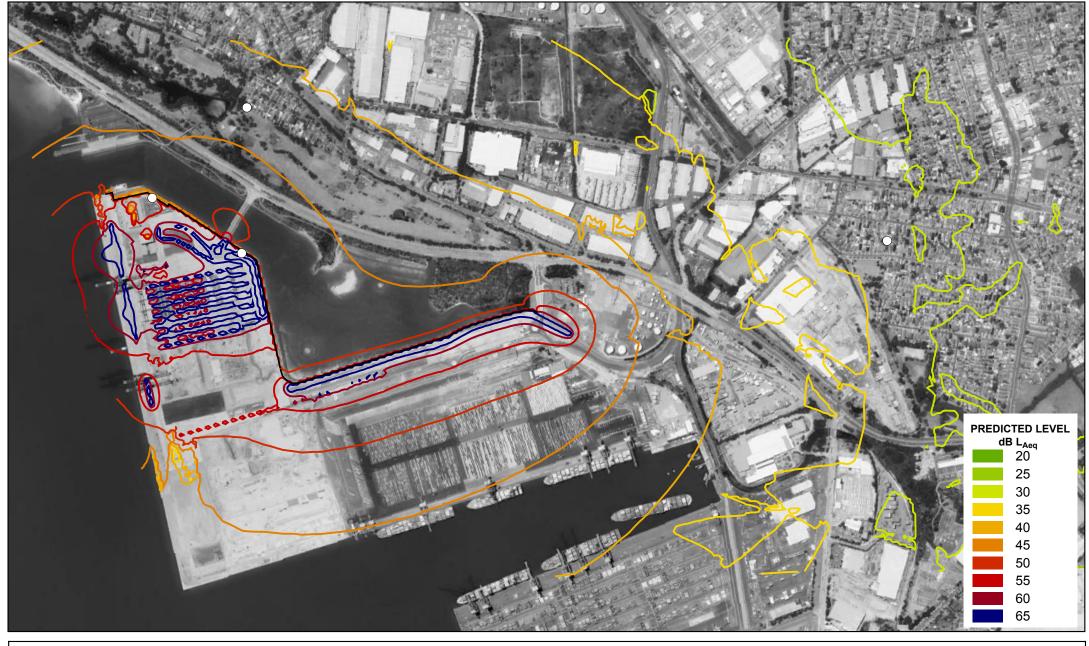



Prediction method: ISO 9613-2:1996

Model number: 1
Version: SoundPLAN 7.4

File: Day Typical

Prediction Height: 1.5 m

Project number: 2016256SY

Client name: SICTL

#### **SCALE**


0 50 100 200 300 400 m



## **Survey 2 - February 2017**

Day/Evening - Worst Case Operation



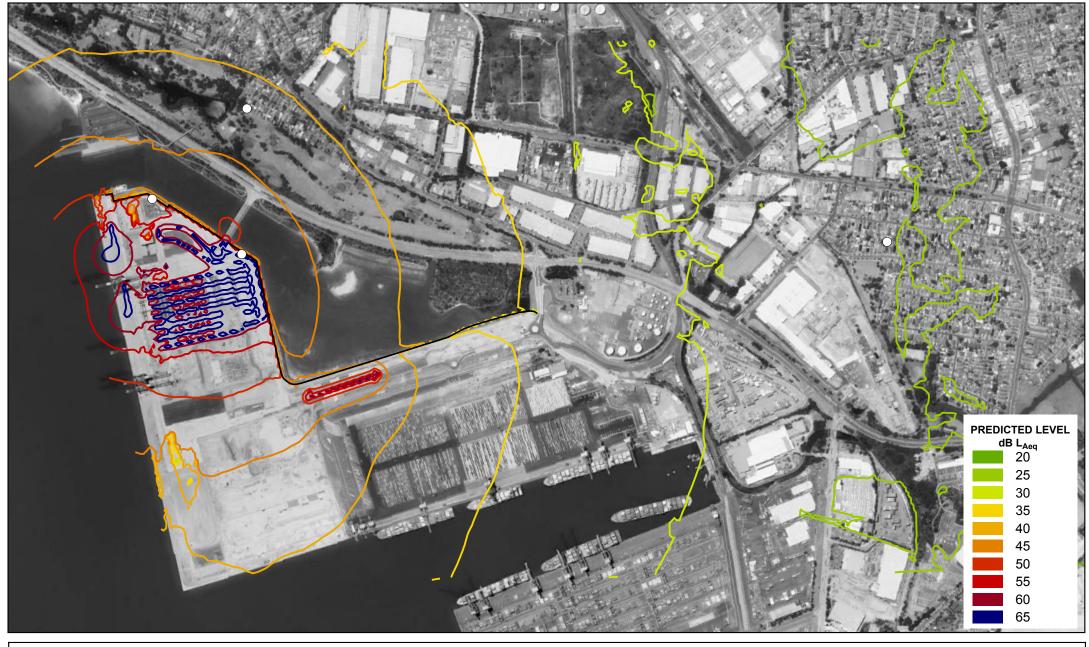



Prediction method: ISO 9613-2:1996

Model number: 1
Version: SoundPLAN 7.4


Prediction Height: 1.5 m

File: Day Typical

Project number: 2016256SY

Client name: SICTL

## **SCALE**






## **Survey 2 - February 2017**

Night - Typical Operation



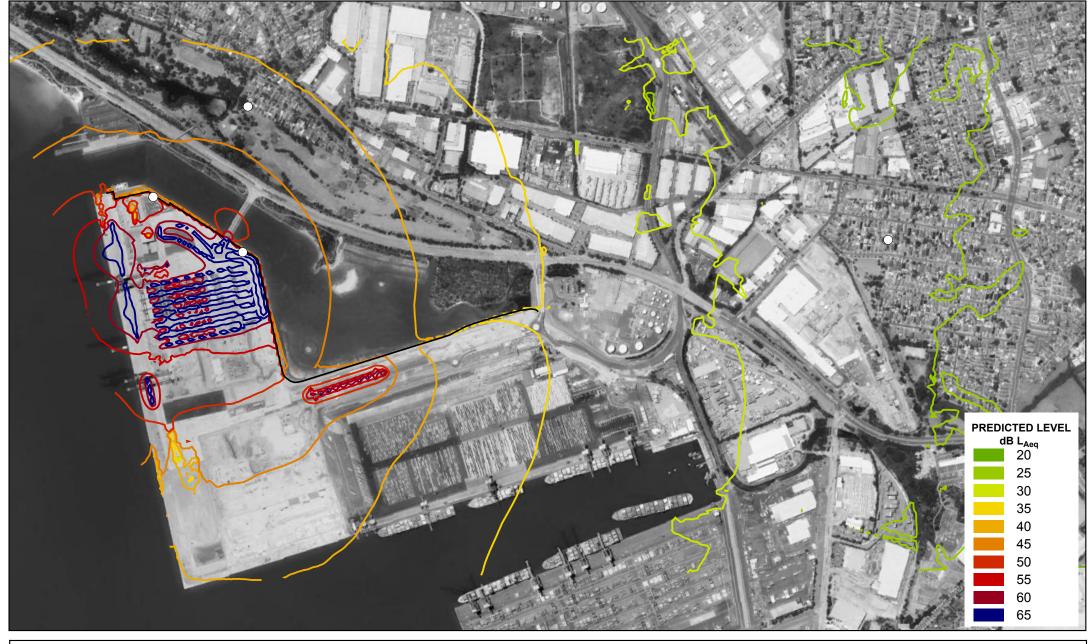



Prediction method: ISO 9613-2:1996

Model number: 1
Version: SoundPLAN 7.4


File: Day Typical

Prediction Height: 1.5 m

Project number: 2016256SY

Client name: SICTL

## **SCALE**





# Survey 2 - February 2017

Night - Worst Case Operation

